

# RUL Estimation Using an Adaptive Inverse Gaussian Model

Wenjia Xu<sup>a</sup>, Wenbin Wang<sup>b</sup><sup>a</sup>Salford Business School, University of Salford, Salford, M5 4WT, UK<sup>b</sup>Dongling School of Economics and Management, University of Science and Technology Beijing, 30 Xueyuan Road Haidian, Beijing, China  
[wangwb@ustb.edu.cn](mailto:wangwb@ustb.edu.cn)

In this paper, an adaptive inverse Gaussian stochastic process is developed to characterize the degradation process of condition monitored components. The knowledge of the degradation process is updated through the parameter of the process when new observations are available. The updating is performed through a general Bayesian filtering process within a state space model setting. The proposed adaptive model is history-dependent and can adjust itself to the sudden changes in degradation signals. The numerical case study shows that the variance of the RUL distribution obtained from the adaptive model is less than that of the conventional inverse Gaussian model and the predictive accuracy is improved by using the adaptive model in terms of TMSE. To validate our adaptive model further, we conduct a model prediction accuracy test. Our test result enables us to conclude that our model is stable, robust and beneficial for the application in prognostics and health management of systems.

## 1. Introduction

With the appearance of large industrial systems covering wide areas or large populations, such as electrical power systems, marine and aviation systems, prognostics has become increasingly important for optimising the operation of these systems and their critical components in terms of higher reliability, less cost, higher production quality, better inventory planning and more effective reuse of industrial resources (Jardine et al. (2006)). A timely and correct prognostic method could assist the selection of effective condition based strategies for industrial purposes, especially for vital or critical systems (Pecht (2008)). An effective prognostic strategy usually involves the accurate prediction of residual useful life (RUL) for a system under investigation.

Stochastic processes have been used widely for modelling degradation because of uncertainty relating to the nature of system deterioration (Engel et al., 2000). The RUL of such a system can be solved through finding the first passage time (FPT) of the degradation process. The inverse Gaussian (IG) process is best known as corresponding to the first passage time of a Brownian motion with drift. Nevertheless, the utilization of the IG process to model degradation has not drawn much attention. Only Wang and Xu (2010) appeared to use an IG process to describe component degradation for the purpose of time to failure prediction. However, in their paper, they considered predicting the RUL using only current degradation information and did not investigate the impact of past CM information on the prediction of RUL. This issue has been addressed both in Si et al. (2011a) and Wang et al. (2011), but not in the context of IG processes. However they have demonstrated that using both past and current CM information is critical to the accuracy of prognosis. Therefore, we believe it is necessary to make the IG degradation process adaptive to past information for the purpose of RUL prognosis.

## 2. Adaptive degradation modelling using an inverse Gaussian process

### 2.1 Inverse Gaussian process

An inverse Gaussian process is a stochastic process with independent inverse Gaussian distributed increments. We now define an inverse Gaussian process as described in Chhikara and Folks (1989), with

mean parameter  $bt$  and scale parameter  $\lambda t^2$ , as a stochastic process  $\{X_t, t \geq 0\}$  with the following properties:

1.  $X_0 = 0$  with probability one;
2.  $X_t$  has independent increments, so that for every pair of disjoint intervals  $(t_1, t_2)$  and  $(t_3, t_4)$  with  $t_1 < t_2 < t_3 < t_4$ , the random variables  $X_{t_2} - X_{t_1}$  and  $X_{t_4} - X_{t_3}$  are independent;
3. Each increment  $X_\tau - X_t$  has an inverse Gaussian distribution with mean  $b(\tau - t)$  and scale parameter  $\lambda(\tau - t)^2$ , for all  $\tau > t$ .

Let  $L$  be the threshold of an inverse Gaussian process, and suppose that we are interested in the distribution of the time  $T$  that the degradation first exceeds  $L$ , assuming it starts from 0. Here we use  $F_T(t)$  to denote the distribution function of FPT. Since it is a non-decreasing process, the definition of FTP  $T = \inf\{t : X_t \geq L\}$  is equivalent to  $T = \{t : X_t \geq L\}$ . It follows that the distribution of FPT for an inverse Gaussian process is derived in the following way (Wang and Xu, 2010),

$$F_T(t) = P(X_t \geq L) = \Phi\left(-\sqrt{\frac{\lambda}{L}}\left(\frac{L}{b} - t\right)\right) - \exp\left(\frac{2\lambda t}{b}\right)\Phi\left(-\sqrt{\frac{\lambda}{L}}\left(\frac{L}{b} + t\right)\right) \quad (1)$$

where  $\Phi(\cdot)$  is the CDF of standard normal distribution. By differentiating Equation (1) with respect to  $t$ , we obtain a formula for the PDF of the first passage time  $T$ .

## 2.2 Adaptive degradation modelling

An inverse Gaussian process  $\Gamma_t$  with mean parameter  $b_t = b_i t$  and scale parameter  $\lambda t^2$  can be used for describing the evolution of the degradation based on obtained condition monitoring (CM) information. We use some additional notation:  $m$  is the number of CM points before failure;  $t_i$  is the time of the  $i$ th CM point;  $Y_t$  is a random variable representing the CM information at time  $t$ ;  $y_t$  is the observed realisation of  $Y_t$ ;  $\mathbf{Y}_i = \{y_{t_0}, y_{t_1}, \dots, y_{t_i}\}$  is the history of degradation observations for the plant up to time  $t_i$ . At each CM point  $t_i$ , we observe the current degradation observation  $y_{t_i}$ . The future degradation  $y_t$ ,  $t > t_i$  is regarded as a three-parameter inverse Gaussian random variable with location parameter  $y_{t_i}$ , mean parameter  $b_i(t - t_i)$  and scale parameter  $\lambda(t - t_i)^2$ . The probability density function of  $y_t$  is given as.

$$p(y_t | y_{t_i}; b_i, \lambda) = \sqrt{\frac{\lambda(t - t_i)^2}{2\pi v_{t_i}^3}} \exp\left\{-\frac{\lambda(t - t_i)^2 v_{t_i}}{2} \left(b_i(t - t_i) - \frac{1}{v_{t_i}}\right)^2\right\} \quad (2)$$

## 2.3 Updating the mean parameter

From section 2.2, it is noted that  $b_{t_i}$  is not a constant and regarded as a random variable. Therefore, we construct a state space model for the evolution of  $b_{t_i}$ . In this state space setting,  $b_{t_i}$  can be updated through a Bayesian filtering process at each CM point once new information is obtained. It is worth noting that the updating process for  $b_{t_i}$  is difficult as an analytical form is not generally available. As such, we make a few assumptions and attempt to obtain a closed form for  $b_{t_i}$ . First, we assume that CM information is collected based on a fixed time interval. This is a mild and reasonable assumption as, in practice, fixed time sampling is widely used and is also convenient. For notational simplicity, we will use

$\Delta t$  to denote the equal interval. The increment  $v_{t_i}$  is the value between the current checking point  $y_{t_i}$  and the last point  $y_{t_{i-1}}$ ,  $v_{t_i} = y_{t_i} - y_{t_{i-1}}$ . In the following work, we use  $\mathbf{V}_{t_i} = \{v_{t_1}, v_{t_2}, \dots, v_{t_i}\}$  as the observed information which is equivalent to  $\mathbf{Y}_{t_i} = \{y_{t_0}, y_{t_1}, \dots, y_{t_i}\}$ . According to the properties of an inverse Gaussian process, at each CM point  $t_i$ , the increment follows an inverse Gaussian distribution, that is  $p(v_{t_i} | b_{t_i}) = IG(v_{t_i}; b_{t_i} \Delta t, \lambda \Delta t^2)$ . The mean parameter  $b_{t_i}$  before considering the observed  $y_{t_i}$  is assumed to satisfy  $b_{t_i} = b_{t_{i-1}}$ . Then the semi-deterministic state space equation (Equation (3)) is constructed for the updating of  $b_{t_i}$ . Other state space equations can also be considered, and the reasons we choose this particular type lie in: 1). An explicit solution can be obtained in this model setting; 2. it is reasonable to assume that in between two checking points, the mean parameter does not change dramatically. In other cases, a particle filtering method is needed to get an approximate solution.

$$\begin{cases} b_{t_i} = b_{t_{i-1}} \\ p(v_{t_i} | b_{t_i}) = \sqrt{\frac{\lambda \Delta t^2}{2\pi v_{t_i}^3}} \exp\left\{-\frac{\lambda \Delta t^2 v_{t_i}}{2} \left(b_{t_i} \Delta t - \frac{1}{v_{t_i}}\right)^2\right\} \end{cases} \quad (3)$$

Then, under a Bayesian filtering process, we have from Equation (3) that

$$p(b_{t_i} | \mathbf{V}_{t_i}) = p(b_{t_i} | v_{t_i}, \mathbf{V}_{t_{i-1}}) = \frac{p(v_{t_i} b_{t_i} | \mathbf{V}_{t_{i-1}})}{p(v_{t_i} | \mathbf{V}_{t_{i-1}})} = \frac{p(v_{t_i} | b_{t_i}) p(b_{t_i} | \mathbf{V}_{t_{i-1}})}{\int_0^\infty p(v_{t_i} | b_{t_i}) p(b_{t_i} | \mathbf{V}_{t_{i-1}}) dk_{t_i}} \quad (4)$$

Recursively applying the Bayes' rule, we have the probability distribution of  $b_{t_i}$  conditional on the collected information up to time  $t_i$

$$p(b_{t_i} | \mathbf{V}_{t_i}) = \frac{p(v_{t_i} | b_{t_i}) p(v_{t_{i-1}} | b_{t_{i-1}}) \dots p(v_{t_1} | b_{t_1}) p(b_{t_i} | V_0)}{\int_0^\infty p(v_{t_i} | b_{t_i}) p(v_{t_{i-1}} | b_{t_{i-1}}) \dots p(v_{t_1} | b_{t_1}) p(b_{t_i} | V_0) dk_{t_i}} \quad (5)$$

As  $b_{t_i} = b_{t_{i-1}}$  is assumed,  $p(b_{t_i} | V_0) = p(b_{t_{i-1}} | V_0) = p(b_{t_0} | V_0)$  holds. This largely decreases the computational burden of the estimation process and this is another reason why we choose the deterministic form  $b_{t_i} = b_{t_{i-1}}$ . Then the distribution of  $p(b_{t_0} | V_0)$  is essential to get an explicit solution of Equation (5). In Banerjee and Bhattacharyya (1979) and Seshadri (1993), it has been established that if the prior distribution of a random variable follows a truncated normal distribution, left truncated at 0, then the posterior distribution should be from the gamma family. Now we assume that the distribution of  $p(b_{t_0} | V_0)$  follows a left truncated normal distribution with parameters  $1/\beta_0$  and  $1/\tau_0$ :

$$p(b_{t_0} | V_0) = \frac{\frac{1}{\sqrt{2\pi/\tau_0}} e^{-\frac{(b_{t_0}-1/\beta_0)^2}{2/\tau_0}}}{\int_0^\infty \frac{1}{\sqrt{2\pi/\tau_0}} e^{-\frac{(b_0-1/\beta_0)^2}{2/\tau_0}} db_0} = \frac{e^{-\frac{(b_{t_0}-1/\beta_0)^2}{2/\tau_0}}}{\int_0^\infty e^{-\frac{(b_0-1/\beta_0)^2}{2/\tau_0}} db_0} \quad (6)$$

Substituting the PDF of  $p(b_{t_0} | V_0)$  into Equation (5), we have the distribution of the mean parameter  $b_{t_i}$  detailed in equation (7) through several manipulations:

$$p(b_{t_i} | \mathbf{V}_{t_i}) = \frac{\exp\left\{\frac{-\tau_i(b_{t_i} - 1/\beta_i)^2}{2}\right\}}{\int_0^\infty \exp\left\{\frac{-\tau_i[b_{t_i} - 1/\beta_i]^2}{2}\right\} db_{t_i}} \quad (7)$$

$$\text{where } \tau_i = \lambda \Delta t^2 \sum_{j=1}^i v_{t_j} + \tau_0, 1/\beta_i = \frac{i\Delta t + \tau_0 / (\lambda\beta_0)}{\Delta t^2 \sum_{j=1}^i v_{t_j} + \tau_0 / \lambda}$$

For simplicity, we let  $\tau_0 = \alpha\lambda\beta_0$ , then the parameters  $\beta_i$  and  $\tau_i$  in the PDF  $p(b_{t_i} | \mathbf{V}_{t_i})$  can be expressed in terms of parameters  $\lambda$ ,  $\alpha$  and  $\beta_0$  as.

$$\beta_i = \frac{\Delta t^2 \sum_{j=1}^i v_{t_j} + \alpha\beta_0}{i\Delta t + \alpha}, \quad \tau_i = \lambda \Delta t^2 \sum_{j=1}^i v_{t_j} + \alpha\lambda\beta_0 \quad (8)$$

Having the density function of  $p(b_{t_i} | \mathbf{V}_{t_i})$  available, we can substitute the mean of  $b_{t_i}$  into Equation (1) in order to get the time to failure or RUL at each monitored point. Alternatively, we could utilize the whole distribution of  $p(b_{t_i} | \mathbf{V}_{t_i})$  for the calculation of RUL as discussed in Si et al. (2013).

### 3. Numerical example

In this section, we provide a numerical example of crack growth to demonstrate the performance of an adaptive inverse Gaussian process based degradation model and the conventional inverse Gaussian model. The crack growth data are from Lu and Meeker (1993). The expectation maximization (EM) algorithm (Dempster et al., 1977) is applied for parameter estimation as hidden variable is used in our model. The parameters in the conventional inverse Gaussian model are estimated using the maximum likelihood estimation algorithm (Kendall and Alan, 1973). The estimated parameters for both models are presented in Table 1.

Table 1 Estimated parameter values for both models

| Parameter | Adaptive model | Parameter | Conventional model |
|-----------|----------------|-----------|--------------------|
| $\alpha$  | 31.6860        | b         | 0.0602             |
| $\beta_0$ | 61.7136        | $\lambda$ | 0.3240             |

Using the estimated increments, the tracking ability of the adaptive model can be demonstrated. Figure 1 compares the length of a real crack and the predicted results of the crack length. It can be seen that the predicted results from the adaptive model are closer to the real data. It should be noted that the real crack length increases at a higher rate after check time eight. Since the adaptive model adjusts its parameters from new observed information, the new crack length information is utilized in the model to update the parameters for future prediction after each check time. From Figure 1, it is shown that the estimated crack length agrees with the suddenly increasing rate of the real crack growth at check point eight and the adaptive model quickly catches up with this change, by adjusting itself to follow the real situation.

Using the estimated parameters, we can also derive the PDF of the failure time or RUL using Equation (1). For comparison purposes, we plot the RUL PDFs for both models, the adaptive inverse Gaussian based model and the conventional inverse Gaussian based model, in Figure 2. The real RULs are lying in 95 % confidence interval of RUL distribution obtained from the adaptive model at each CM point. While for the

RUL distribution obtained from conventional model, the real RUL at the last CM point falls out of the 95 % confidence interval. In addition, the real RULs are noticeably much closer to the modes of the RUL distributions obtained from the adaptive model as time progresses. Furthermore, the variances of the RULs produced by the adaptive model are apparently smaller than those of the conventional model, which shows that the predictive accuracy of the former is better than that of the latter.

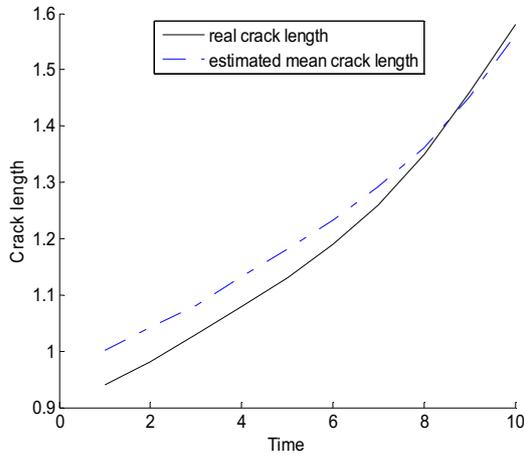


Figure 1 Crack length prediction

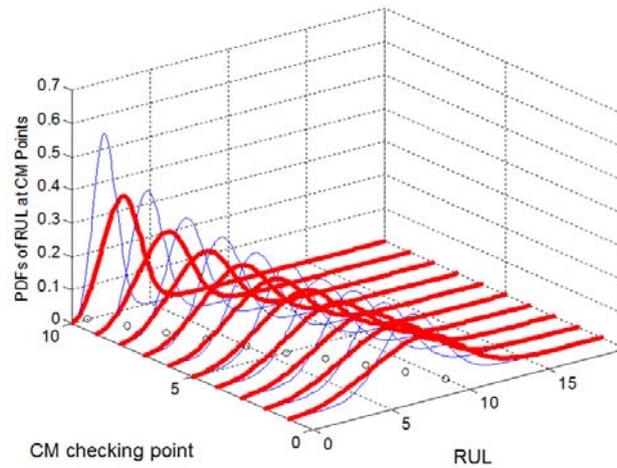


Figure 2 Residual life PDFs of adaptive inverse Gaussian model (blue) and conventional inverse Gaussian model (red bold)

In addition, we compare, for each testing data group, the probabilities of late prediction of both models in Table 2, which are the probabilities of predicting the RUL later than the real RUL. In asset management, late predictions might cause catastrophic consequences and late alarms will be punished heavily. Thus the probability of late prediction is usually used as a popular criterion for many safety critical systems. A smaller probability of late prediction commonly ensures a higher reliability of the system.

Table 2 Average late prediction probability

| Average late prediction probability | Group 1 | Group 2 | Group 3 | Group 4 | Group 5 | Group 6 |
|-------------------------------------|---------|---------|---------|---------|---------|---------|
| Adaptive inverse Gaussian           | 0.5949  | 0.5785  | 0.5722  | 0.5781  | 0.5704  | 0.5714  |
| Conventional inverse Gaussian       | 0.6018  | 0.5837  | 0.5786  | 0.5839  | 0.5784  | 0.5768  |

From Table 2, we note that the difference between total late prediction probabilities produced from both models is not great, but the outcomes from the conventional inverse Gaussian process based model are still slightly larger than those from the adaptive inverse Gaussian model for all the six groups of testing data.

Next, the total mean square errors (TMSE) of these two models are calculated and the results are presented in Table 3. TMSE is a key criterion for model comparison and selection, and a model with smaller TMSE is usually regarded as a better model. The results show that the TMSE of the adaptive inverse Gaussian model is about 35 % smaller than that of the conventional inverse Gaussian model, which provides further evidence in support of the conclusion that the proposed adaptive model is better than the conventional model.

Table 3 TMSE comparison

| Model                               | TMSE     |
|-------------------------------------|----------|
| Adaptive inverse Gaussian model     | 321.1910 |
| Conventional inverse Gaussian model | 498.6807 |

To validate our model further, we conduct a model prediction accuracy test. We choose six groups at random from the twelve available; then we train the six groups and test with the other six groups. The process is repeated a further three times, so that we conduct a total of four independent experiments.

Throughout the parameter estimation and testing procedures for both the adaptive Gaussian model and the conventional Gaussian model, we get the prediction results shown in Table 4. By comparing these model outputs, we can assess whether the model is sensitive to the data change. From Table 4, we can see that our model performs reasonably consistently for the given different datasets and outperforms the conventional Gaussian model respectively in terms of TMSE. Therefore, our prediction accuracy test enables us to conclude that our model is stable, robust and beneficial for the analysis of different datasets.

*Table 4 TMSE results of four trials for conventional and adaptive Gaussian models*

| Model TMSE                  | Trial 1  | Trial 2  | Trial 3  | Trial 4  |
|-----------------------------|----------|----------|----------|----------|
| Adaptive Gaussian model     | 276.9428 | 269.572  | 343.4941 | 290.4350 |
| Conventional Gaussian model | 451.907  | 449.7512 | 511.4516 | 468.3932 |

#### 4. Conclusions

In this paper, an adaptive inverse Gaussian stochastic process is developed to characterize the degradation process of monitored components. The knowledge of the degradation process is updated through the mean parameter of the inverse Gaussian process when new observations are available. The updating is performed through a general Bayesian filtering process within a state space model setting. The proposed adaptive model is history-dependent and could adjust itself to the sudden changes in degradation signals. The numerical case study shows that the variance of the RUL distribution obtained from the adaptive model is less than that of the conventional inverse Gaussian model and the predictive accuracy is improved by using an adaptive model in terms of TMSE. Furthermore, a model prediction accuracy test is carried out to validate our model. The results show that the adaptive Gaussian model is robust and can be applied to different datasets with desirable results.

#### Acknowledgement

This research is partially supported by NSFC under grant number 71231001, by the MOE PhD supervisor's fund and by the Fundamental Research Funds for the Central Universities of China , FRF-SD-12-020A.

#### References

- Banerjee A., Bhattacharyya G., 1979, Bayesian results for the inverse Gaussian distribution with an application. *Technometrics*, 21, 247-251.
- Chhikara R. S., Folks L., 1989, *The inverse Gaussian distribution: theory, methodology, and applications*, Marcel Dekker, New York.
- Dempster A., Laird N., Rubin D., 1977, Maximum likelihood from incomplete data via the EM algorithm. *Journal of the Royal Statistical Society. Series B (Methodological)*, 39, 1-38.
- Engel S. J., Gilmartin B. J., Bongort K., Hess A., 2000, Prognostics, the real issues involved with predicting life remaining. *Aerospace Conference Proceedings*. Big Sky, MT, IEEE.
- Jardine A. K. S., Lin D., Banjevic D., 2006, A review on machinery diagnostics and prognostics implementing condition-based maintenance. *Mechanical Systems and Signal Processing*, 20, 1483-1510.
- Kendall M. G., Alan S., 1973, *The advanced theory of statistics*, London, Griffin.
- Lu C., Meeker W., 1993, Using degradation measures to estimate a time-to-failure distribution. *Technometrics*, 35, 161-174.
- Pecht M., 2008, *Prognostics and health management of electronics*, Wiley Online Library.
- Si X. S., Wang W., Hu C., Zhou D.H, 2011a, Remaining useful life estimation-A review on the statistical data driven approaches. *European Journal of Operational Research*, 213, 1-14.
- Si X. S., Wang W., Hu C. H., Chen M. Y., Zhou D. H, 2013, A Wiener-process-based degradation model with a recursive filter algorithm for remaining useful life estimation. *Mechanical Systems and Signal Processing*.
- Seshadri V., 1993, *The inverse Gaussian distribution: a case study in exponential families*, Oxford University Press, USA.
- Wang X., Xu D., 2010, An inverse Gaussian process model for degradation data. *Technometrics*, 52, 188-197.
- Wang W., Carr M., Xu W., Kobbacy K., 2011, A model for residual life prediction based on Brownian motion with an adaptive drift. *Microelectronics Reliability*, 51, 285-293.