

Combined continuous machine to condition olive paste: rheological characterization of olive paste

Antonia Tamborrino^a, Claudio Perone^{b*}, Hazar Mojaed^b, Roberto Romaniello^b, Antonio Berardi^b, Pasquale Catalano^c, Alessandro Leone^a

^a Department of Agricultural and Environmental Science, University of Bari Aldo Moro, Via Amendola, 156/a – 70126 Bari, ITALY

^b Dept of the Science of Agriculture, Food and Environment, University of Foggia - Via Napoli, 25 – 71121 Foggia, ITALY.

^c Department of Agriculture, Environment and Food, University of Molise, Via De Sanctis. n.c. – 86100 Campobasso, ITALY
antonia.tamborrino@uniba.it

claudioperone@gmail.com

Food matrix structures are becoming more and more investigated from a rheological characterization point of view because this influences their behavior in the food process phases. In this study, a brief characterization of olive paste is attempted according to their rheological profile. Moreover, the influence of new technologies to prepare the olive paste on the rheological characteristics of olive paste is presented. The small olive oil droplet size, solid volume fraction, and the strong interactions of droplet interfaces are significant factors that change the rheological profile of the olive paste during the olive oil extraction process. The process involved, in fact, favors a decrease of viscosity of the initial matrix used which occurs mainly with the passage of the oil paste in the malaxer reaching an adequate viscosity. However, the viscosity of processed olive paste depends on the raw material, according to various factors such as the pedo-climatic conditions, agronomic techniques, the ripening index of the drupes, cultivars used, processing technologies that have a strong influence on the solid/liquid ratio. Therefore, the objective of the present study is to investigate the rheological properties of the olive paste when a combined heat-exchange and microwave machine are used.

1. Introduction

New technologies have been tested to improve the olive paste. The introduction of ultrasonics, microwaves, pulsed electric fields, heat exchangers are among the new technologies studied for optimization in the olive oil extraction industry (Leone et al., 2018; Caponio et al., 2019; Romaniello et al., 2019; Servili et al., 2019; Tamborrino et al., 2019b; Tamborrino et al., 2020b). In industry, recently been developed to study a new combined machine including an innovative heat exchanger and a microwave module, to improve the continuous mode, in industry, the olive paste for extra-virgin olive oil extraction. The goal of these transitions is to take place during the unit operation in food industry is to optimize, enhance the energy efficiency and, in the other hand, consistency, taste, and nutrient value of the final product (Bianchi et al., 2013; Leone et al., 2015; Perone et al., 2017; Tamborrino et al., 2019a; Catalano et al., 2020; Tamborrino et al., 2020a). But to assess optimization in the olive oil mills, in terms of maximum extraction yield with excellent quality, it is essential to understand how the parameters of the olive paste are determined by the technological treatments (type, size and solid distribution of particles, interactions between particles) and how the flow behavior of the olive paste can be related to the treatment parameters (Masella et al., 2008). Olive paste is a solid-liquid mixture consisting of two distinct liquid phases (oil and water) and an extremely heterogeneous solid phase. Assessing parameters strongly influence its physical and chemical characteristics (relative amounts of different phases and their interactions, degree of emulsification, and solid fragment dimensions) which in turn influence its rheological properties (Tamborrino et al., 2014; Petrakis, 2006).

In food processing, rheology plays a key role because it assesses the quality of raw materials, identifies material behavior during processing, and meeting storage and stability requirements (Ibarz and Barbosa-Cánovas, 2003; Toledo et al., 2018). To have a wider understanding of the rheology of olive paste, it is first necessary to analyze the rheological behavior of the raw material and therefore of the drupe (fruit of the olive tree). Several parameters, such as temperature, degree of ripeness of the drupe, cultivars used, processing techniques, and the olive paste, affect the rheology of olives, since the most important variables in defining the quality of the raw material. In general, it is found that olive paste shows its rheological behavior, but if they are considered as a whole they do not assume very complex characteristics. Olive paste, in fact, shows Newtonian behavior (Yodi et al., 2009), while the vegetable water and solid particles are non-Newtonian fluids. The olive paste assumes non-Newtonian behavior (Di Renzo & Lelli, 1997; Tamborrino et al., 2014; Romaniello et al., 2017). Moreover, solid particles, it is a shear-thinning fluid, and pseudoplastic, characterized by a reduction in viscosity as the shear rate increases (Boncinelli et al., 2009; Boncinelli et al., 2013). It is also found that the power-law model adequately describes the rheological behavior of olive paste. According to it, behavior is a time-independent shear-thinning (pseudoplastic) fluid characterized by a shear limit. Thus, viscosity is an important parameter for characterizing the behavior of olive paste when it is under the influence of various technological parameters. It varies from the inlet to the outlet of the extrusion line and generally can be assessed through viscosimetric measurements (in-line or off-line), and it can be based on the experience of the operator; however, it is not an objective parameter of assessment. The objective of this paper is to investigate on rheological characteristics of the olive paste when conditioned with a new technology consisting of a heat exchanger and microwave continuous system (HE-MW). So far, it can be determined, reports about the rheological behavior of olive paste when undergoing the processing parameters are scarce, they always need in-depth analysis, especially when new processes are introduced. Such studies are of practical importance as they help to understand the behavior of the olive paste when it is under the influence of different technological process parameters. It could also serve as a significant role in the analysis of flow conditions to propose a mathematical model that can correctly describe how the viscosity of the olive paste varies during the various stages of its processing.

2. Materials and Methods

2.1 Industrial olive mill and experimental equipment with HE and MW continuous system

Experimental tests were carried out in an industrial olive mill located in Corato (Puglia region – Italy). Figure 1 shows the flow chart of the main operations involved in the extraction process of the mill. The extraction process began with a defoliator (mod. Morgana, Mercuri, Rosarno (RC), Italy) and a washing machine (mod. LVST, Vitone Eco S.r.l., Bitonto (BA), Italy) to remove leaves and clean the drupes. A hammer crusher (mod. FR 25, Vitone Eco S.r.l., Bitonto (BA), Italy) was used to mill the cleaned olives, and the obtained paste was then moved toward the combined continuous machine (HE-MW). The paste is then malaxed (malaxer, mod. GR 700, Vitone Eco S.r.l., Bitonto (BA), Italy), before undergone a solid-liquid separation (2-phase decanter centrifuge, mod. V2, Vitone Eco S.r.l., Bitonto (BA), Italy) and a subsequent liquid-liquid separation (vertical centrifuge, mod. V2700 Mr.Oil, Vitone Eco S.r.l., Bitonto (BA), Italy).

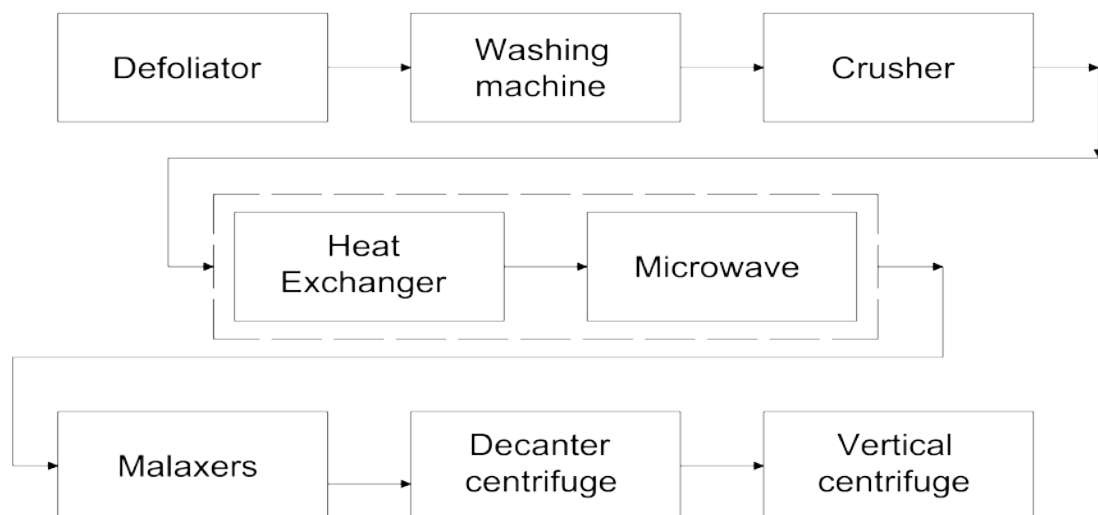


Figure 1: Flow chart of the extraction process mill.

The combined continuous machine consists of two sections assembled in series. The first section is constituted by a tube-in-tube heat exchanger, in which the olive paste flows in the inner tube, and hot water in the external jacket, in a counter-current direction. The inner tube is equipped with a rotating helix moved by an electric motor driven by a mechanical speed reducer. The inner helix has the main aim of improving the heat transfer, reduce the operating pressure, and gently kneading the olive paste. Connected to the outlet of the heat exchanger, it was placed the microwave section. It was made of a cavity resonator, in the middle of which is located a polypropylene tube for the microwave treatment of the paste flowing in it. The control of this new conditioning technology happens through a PLC that allows adjusting the output temperature of the paste in the function of its inlet temperature and mass flow rate.

2.2 Experimental design

Experimental trials were carried out processing the olive paste of three different varieties in an industrial olive oil mill by using the HE-MW continuous system. Data were acquired concerning viscosity measurements carried out on olive paste before and after the HE-MW treatment. The collected data consist of apparent viscosity values, the related shear rates, and the composition of the olive paste. These data were interpolated using a power-law model, whose parameters were determined by means of linear regression in a bi-logarithmic scale. The test carried out by using olive fruit of the varieties Cima di Bitonto, Frantoio and Peranzana (*Olea europaea* L.) having a maturity index of 2.1 (Cima di Bitonto), 2.3 (Frantoio) and 2.5 (Peranzana). The maturity index was detected using the method reported in Uceda et al. (1975).

Five consecutive oil extraction tests were carried out for each variety, using homogeneous batches of 700 kg of olives.

The experimental design is summarized as follows:

- Before treatment, where the olive paste was obtained and sampled after the crushing stage;
- After treatment, where the olive paste was obtained and sampled after the HE-MW conditioning, conducted by flowing in a continuous way the olive paste through the heat exchange and MW system and setting the output temperature of 27 °C.

For each test, three samples of olive paste were taken, before and after treatment, for the rheological measurements.

2.3 Rheological measurements

Viscosity determinations were carried out using a rotational rheometer (model DV2-HBT Brookfield Engineering Laboratories, Inc., Stoughton, MA, USA) equipped with a disc spindle (model RV/HA/HB-4; Brookfield DVII + Brookfield Engineering Laboratories). Viscosity measurements were carried out using 500 mL of olive paste, loaded into a 1000 mL glass container conditioned at 27 °C in a thermostatic bath. The apparent viscosity was taken at rotational speeds from 0.5 to 200 rpm (Tamborrino et al., 2014). Numerical conversion values were used to convert the torque-speed and scale readings into shear stress–shear rate relationships. An empirical power-law model was used to calculate the apparent viscosity and flow behavior index from the shear rate (Eq. (1)).

$$\eta_{app} = k\dot{\gamma}^{n-1} \quad (1)$$

where η_{app} is the apparent viscosity, $\dot{\gamma}$ is the shear rate (s^{-1}), n is the flow behavior index (dimensionless), k is the consistency index ($mPa s^n$). The results are expressed as mean of three replications.

2.4 Statistical analysis

The machine learning and statistic toolbox of MATLAB® was used to process the experimental data. The significance among means of group of data was detected by the one-tailed t-test hypothesis test ($p < 0.05$).

3. Results and discussion

3.1 Influence of the HE-MW continuous system on the rheological characteristics

Figure 2, 3, and 4 report the apparent viscosity in a bi-logarithmic scale of the paste as a function of the strain rate, for olive pastes respectively of Cima di Bitonto, Frantoio e Peranzana varieties. A lower apparent viscosity is observed in all the cases of HE-MW treatment. The points were fitted by means of the power-law model as reported in 2.3. Through this model, the most important parameters for pseudoplastic fluids were obtained: the consistency index (K), and the flow behavior index (n). These two parameters can be deduced by the power function in Figure 3. In particular, the base represents the consistency index (in $Pa s^n$) and the exponent is n^{-1} (dimensionless), from which is easily obtainable the flow behavior index. It is worth noting that the power-law model returned an optimal approximation of the rheological behavior of the paste, confirmed by the high values of the coefficient of determination (R^2), which is always above the 99 %, exception made for the Peranzana cultivar before HE-MW treatment. In all cases the, the apparent viscosity for each strain rate value shows a significant difference between before and after HE-MW treatment.

The curves depicted a typical pseudoplastic behavior, particularly the shear-thinning one. For all these fluids with multiple disordered particles with 0symmetriAOI @rtiAles, whiAh @esent 0 dis>rdered st0te, 0s the she0r stress inAre0ses, the visA>sity deAre0se beA0use the @rtiAles Ore >oriented t>w0rds the direAti>n >f @>@g0ti>n >f the 0@0ied f>rAe 0nd theref>re 0lw0ys 0lign themselves m>re by re0Aing 0 st0te >f m>leAul0r >rder. Heter>gene>us systems, A>nt0ining 0 dis@rsed @0se (Von HeAke et 0l., 2012) like olive paste, Ore Ah0r0Aterized by 0 ty@AOI she0r-thinning beh0vi>r. When the hydr>dyn0miA f>rAes during fluid she0r beA>me suffiAiently high, the inter@rtiAle b>nds, whiAh usu0lly >AAur 0t rest, bre0k d>wn 0nd 0 deAre0se in visA>sity results. Less resist0nAe t> fl>w during she0r is then >ffered. The rhe>l>giAOI beh0vi>r is well re@esented by the evol0uti>n >f the visA>sity, 0s vel>Aity gr0dients 0nd A>nsequently the m>ti>n >f sus@ended s>lid @rtiAles 0nd he0t tr0nsfer Ore OffeAted (• mir0nte & ! 0t0l0n>, 1995).

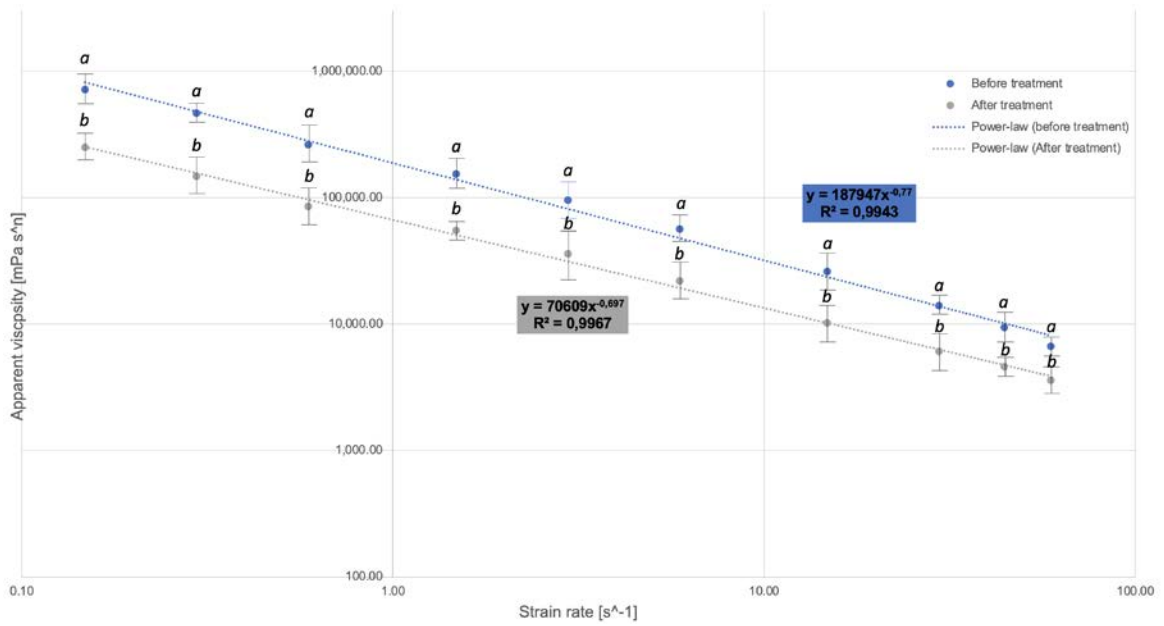


Figure 2: Apparent viscosity vs strain rate in log-log scale before and after the combined treatment for olive pastes of Cima di Bitonto variety

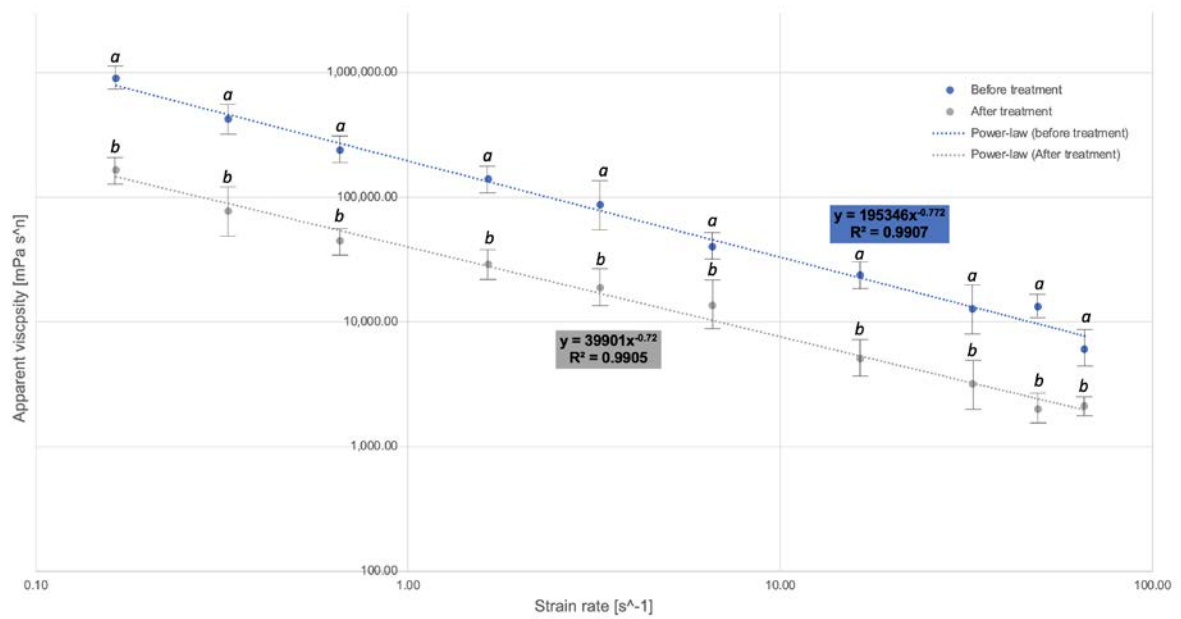


Figure 3: Apparent viscosity vs strain rate in log-log scale before and after the combined treatment for olive pastes of Frantoio variety

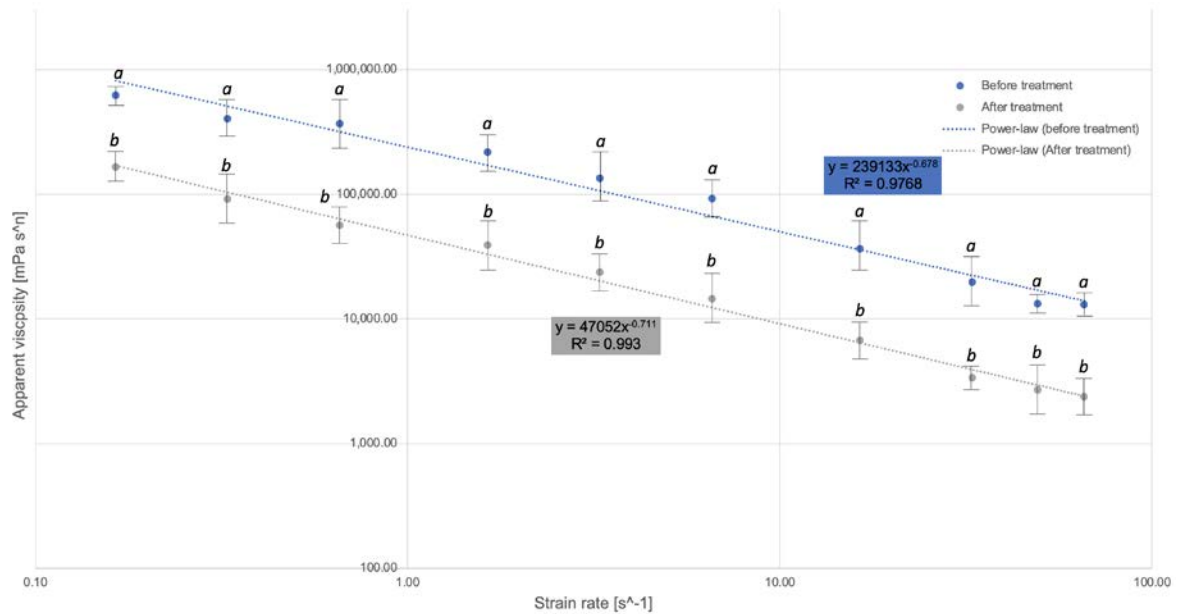


Figure 4: Apparent viscosity vs strain rate in log-log scale before and after the combined treatment for olive pastes of Peranzana variety

The significant reduction of the consistency index, and therefore of the apparent viscosity after the treatment, maybe due to the combined effect of temperature increasing and physical damage of vegetable tissues by means of microwave action. In fact, the heat exchanger raised the temperature of the paste and operated a kind of kneading through the inner mixing helix, producing an additional effect on the reduction of the paste viscosity. In addition, the MW, with its volumetric way of heating, heated up the moisture present in the matrix until its evaporation, generating high pressure on the cell wall and causing its ruptures.

The significant reduction of the viscosity of the olive paste thanks to the combined machine leads to two positive aspects: (i) allows to greatly reduce the malaxation time and consequently allows to improve the olive oil quality; (ii) increases the decanter's extractability and consequently the oil yield.

4. Conclusions

A rheological investigation on olive paste, of different cultivars (Cima di Bitonto, Frantoio and Peranzana), conditioned with a new technology coupling a heat exchange and microwave machine (HE-MW) was carried out in this study. Using a HE-MW machine a significant reduction of the viscosity and the consistency index is observed. The use of a machine capable of treating the olive paste before the passage in the malaxer machine, causing a significant reduction in viscosity, is positively evaluated since the reduction in viscosity appears to be an important parameter for the subsequent centrifugation phase. In fact, one of the main physical parameters influencing the centrifugation process is the olive paste viscosity, which affects the velocity gradients and, therefore, the motion of suspended solid particles that must be removed. This machine allows to reduce the viscosity by exploiting the thermal and mechanical action due to the particular constructive devices, such as the internal spiral of the heat exchanger. This allows to reduce the malaxing times which would normally have allowed a reduction in viscosity. Investing in rheological changes when new machines are incorporated into food processes is essential for process and plant optimization.

Acknowledgments

All authors contributed equally to this work.

References

Amirante R., Catalan P., 1995, Extraction of olive oil by centrifugation: fluid-dynamic aspects and assessment of new extraction plant solutions, *Olivae*, 57, 44-49.

- Ayadi M., Grati-Kamoun N., Attia H., 2009, Physico-chemical change and heat stability of extra virgin olive oils flavoured by selected Tunisian aromatic plants, *Food and Chemical Toxicology*, 47(10), 2613-2619.
- Bianchi B., Tamborrino A., Santoro F., 2013, Assessment of the energy and separation efficiency of the decanter centrifuge with regulation capability of oil water ring in the industrial process line using a continuous method, *Journal of Agricultural Engineering*, 44, 278-282.
- Boncinelli P., Catalano P., Cini E., 2013, Olive paste rheological analysis, *Transactions of the ASABE*, 56(1), 237-243.
- Boncinelli P., Daou M., Cini E., Catalano P., 2009, A simplified model for designing and regulating centrifugal decanters for olive oil production, *Transactions of the ASABE*, 52(6), 1961- 1968.
- Caponio F., Leone A., Squeo G., Tamborrino A., Summo C., 2019, Innovative technologies in virgin olive oil extraction process: influence on volatile compounds and organoleptic characteristics, *Journal of the Science of Food and Agriculture*, 99(12), 5594–5600.
- Catalano F., Perone C., Iannacci, V., Leone A., Tamborrino A., Bianchi B., 2020, Energetic analysis and optimal design of a CHP plant in a frozen food processing factory through a dynamical simulation model, *Energy Conversion and Management*, 225, 113444.
- Catalano P., Montel P., Montel G.L., Leone A., Tamborrino A., 2001, Influenza dei parametri di lavorazione sulle caratteristiche reologiche delle paste di olive snocciolate. Riduzione del costo di produzione, miglioramento della qualità e tutela dell'ambiente nella filiera, *Progetto POM B02, Sciacca (AG)*, 1, 111-125.
- Di Renzo G., Colelli G., 1997, Flow behavior of olive paste, *Applied Engineering in Agriculture*, 13(6), 751-755.
- Formato A., Faugno S., Romano R., Paolillo G., 2005, Caratterizzazione meccanica delle paste di oliva, *Convegno AIIA2005 (Catania, 27-30 giugno 2005)*, Codice lavoro: 7023.
- Ibarz, A., Barbosa-Cánovas, G. V., 2003, Rheology of Food Products, Chapter In: Barbosa-Cánovas, G. V. (Ed.), *Unit Operations in Food Engineering* (CRC, 2003) WW, 89-142, ISBN 1566769299.
- Leone A., Romaniello R., Juliano P, Tamborrino A., 2018, Use of a mixing-coil heat exchanger combined with microwave and ultrasound technology in an olive oil extraction process, *Innovative Food Science and Emerging Technologies*, 50, 66-72
- Leone A., Romaniello R., Peri G., TAMBORRINO A., 2015, Development of a new model of olives de-stoner machine: Evaluation of electric consumption and kernel characterization, *Biomass and Bioenergy*, 81, 108-116.
- Masella P., Parenti A., Spugnoli P., 2008, olive paste consistency as a control parameter for oil extraction: a preliminary approach, *Journal of Agricultural Engineering*, 39(3), 27-30.
- Perone C., Catalano F., Giametta F., Tamborrino A., Bianchi B., Ayr U., 2017, Study and analysis of a cogeneration system with microturbines in a food farming of dry pasta, *Chemical engineering transactions*, 58, 499–504.
- Petrakis C., 9 - Olive Oil Extraction, Editor(s): Dimitrios Boskou, *Olive Oil (Second Edition)*, AOCS Press, 2006, Pages 191-223, ISBN 9781893997882, <https://doi.org/10.1016/B978-1-893997-88-2.50013-4>.
- Romaniello R., Leone A., Tamborrino A., 2017, Specification of a new de-stoner machine: evaluation of machining effects on olive paste's rheology and olive oil yield and quality, *Journal of the Science of Food and Agriculture*, 97(1), 115–121.
- Romaniello R., Tamborrino A., Leone A., 2019, Use of ultrasound and pulsed electric fields technologies applied to the olive oil extraction process, *Chemical Engineering Transactions*, 75, 13-18.
- Servili M., Veneziani G., Taticchi A., Romaniello R., Tamborrino A., Leone A., 2019, Low-frequency, high-power ultrasound treatment at different pressures for olive paste: Effects on olive oil yield and quality, *Ultrasonics Sonochemistry*, 59, 104747.
- Tamborrino A., Catalano P., Leone A., 2014, Using an in-line rotating torque transducer to study the rheological aspects of malaxed olive paste, *Journal of Food Engineering*, 126, 65–71.
- Tamborrino A., Perone C., Catalano F., Squeo G., Caponio F., Bianchi B., 2019(a), Modelling Energy Consumption and Energy-Saving in High-Quality Olive Oil Decanter Centrifuge: Numerical Study and Experimental Validation, *Energies*, 12, 2592.
- Tamborrino A., Romaniello R., Caponi F., Squeo G., Leone A., 2019(b), Combined industrial olive oil extraction plant using ultrasounds, microwave, and heat exchange: Impact on olive oil quality and yield, *Journal of Food Engineering*, 245, 124-130.
- Tamborrino A., Servili M., Leon A., Romaniello R., Perone C., Veneziani G., 2020(a), Partial de-stoning of olive paste to increase olive oil quality, yield, and sustainability of the olive oil extraction process, *European Journal of Lipid Science and Technology*, 122(11).
- Tamborrino A., Urbani S., Servili M., Romaniello R., Perone C., Leone A., 2020 (b), Pulsed electric fields for the treatment of olive pastes in the oil extraction process, *Applied Sciences (Switzerland)*, 10(1).
- Toledo, R.T., Singh, R.K., Kong, F., 2018, Flow of Fluids, Chapter In: Dennis R. Heldman (Ed.), *Fundamentals of Food Process Engineering (Food Science Text Series)*, 81-133, ISBN 9780387290195.

- Uceda M., Frías L., Harvest dates. Evolution of the fruit oil content, oil composition and oil quality, Proc. II. Semin. Oleícola Int. COI. Córdoba. (1975) 125–128.
- Van Hecke E., Nguyen P. U., Clause D., Lanoisellé J. L., 2012, Flow behaviour of carrot puree: modelling the influence of time, temperature and potato flakes addition, International journal of food science & technology, 47(1), 177-185.