

## Composition and Reaction Modeling for the Simulation of Lignin Conversion

Maria Lopez-Abelairas, Luis Pereira de Oliveira, Nadège Charon, Jan J. Verstraete\*

*IFP Energies nouvelles, Rond-point de l'échangeur de Solaize, 69360 Solaize, France*

*\*Corresponding author: [jan.verstraete@ifpen.fr](mailto:jan.verstraete@ifpen.fr)*

### Highlights

- Lignin is represented by a matrix of occurrence probabilities for structural elements
- Hydroconversion of lignin was simulated by a molecule-based Monte Carlo algorithm
- A good agreement with the experimental data was obtained, validating the approach

### 1. Introduction

To convert lignocellulosic biomass into liquids (bio-oils), a large spectrum of thermochemical processes, such as pyrolysis, hydroconversion and catalytic cracking, are currently being developed. However, the high structural complexity of lignocellulosic materials hampers its accurate analytical characterization, as well as the understanding of the conversion mechanisms and their kinetics. In the current work, a stochastic methodology has been developed for the modeling of the conversion of lignin. A probabilistic representation of lignin, the most complex biomass compound, was used and a kinetic Monte Carlo approach was developed for biomass conversion. In the modeling of lignin hydroconversion, a good agreement was obtained between simulated and experimental data for the composition and characteristics of the initial lignin. The kinetic model correctly predicts the composition and some of the physical characteristics of the conversion products.

### 2. Method

The first step of our methodology transforms the available analytical information on the lignin into a set of molecules that has the same average properties. In the second step, the effect of the reactions on the generated set of molecules is simulated using a variable time step kinetic Monte Carlo simulation method.

A representation of the lignin structure on the molecular level cannot be directly obtained from the available analyses, owing to its structural complexity. Hence, these samples are generally characterized by many different analytical techniques, which all highlight different characteristics of the sample. Klein and Virk [1] represented lignins by means of a 6x8 matrix of probabilities of occurrence for different types of aromatic units in the structure. Each row of the matrix is a specific type of methoxyphenol and each column a type of 3-carbon-atom side chain or inter-unit linkage. Each matrix element  $a_{jk}$  represents an aromatic unit composed by a ring equal to the type  $j$  of methoxyphenol and a lateral chain of the type  $k$ . The probability of occurrence of this specific unit is equal to the product of the occurrence of its components. The values of each element in the matrix offer a concise probabilistic description of a lignin polymer. During lignin conversion, however, other structures start to appear. In our work, this representation for the initial lignin has therefore been extended to a 44x22 matrix by including additional lignin moieties and additional linkages to account for the various structures formed during lignin conversion. From this probability matrix, a representative set of molecules can be created by sampling the matrix.


After the composition modeling step, the generated set of molecules is used as input for the molecule-based kinetic modeling of the hydroconversion of lignin. From this representation of the initial lignin and a list of possible reactions, the transformation of the lignin was simulated by means of a kinetic Monte Carlo (kMC) algorithm, described elsewhere [2]. Such a method describes the reaction system at the molecular level by following the transformations of a discrete population of molecules. The corresponding reaction parameters are determined from model compounds in literature with a similar structure to that of the elements in the matrix.

### 3. Results and discussion

The above-described method was applied to a wheat straw soda lignin (Protobind 1000). The Protobind 1000 lignin was characterized by Gel Permeation Chromatography, elemental analysis,  $^1\text{H-NMR}$ , and  $^{13}\text{C-NMR}$ . After phosphitylation, a  $^{31}\text{P-NMR}$  analysis was also performed. Detailed information on these techniques and their results can be found elsewhere [3]. For this lignin, an average molecular weight of 4915 g/mol was obtained. The elemental analysis showed that the lignin contained 65 wt% of carbon, 28 wt% of oxygen, 6 wt% of hydrogen and 1 wt% of nitrogen.

From these analytical data, a matrix of occurrence probabilities was created. After resampling, the set of molecules closely represents the Protobind 1000, as illustrated in Figure 1a for the  $^{13}\text{C-NMR}$  analysis. For the elemental analysis, the molecular weight and polydispersion index, a similar agreement is obtained.

The kMC algorithm was used to simulate the conversion of the lignin, and allows to accurately predict the fractions of gas, liquid and solid (Figure 1b), the gas composition, the composition (elemental analysis, functional groups) of the bio-oil, and the molecular weight and polydispersion index of the residual lignin.

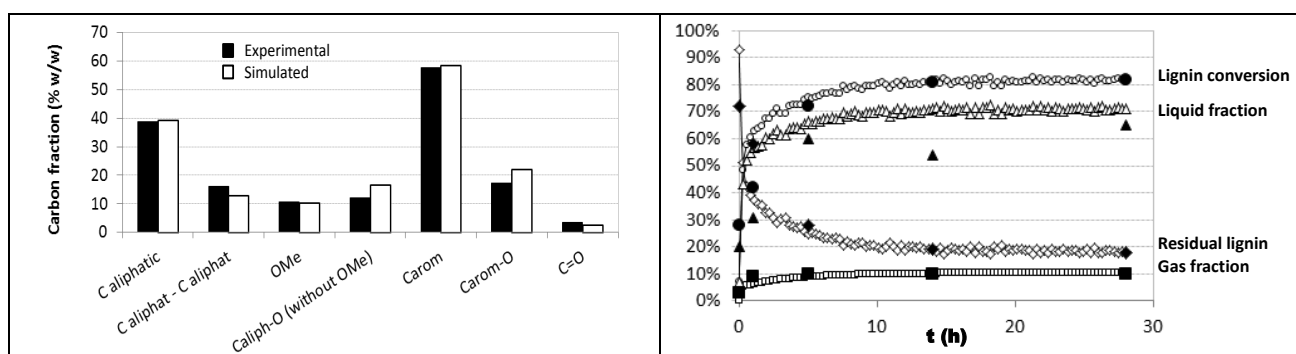

**Figure 1.** Composition and reaction modeling results: (a)  $^{13}\text{C-NMR}$  families for the native lignin: analytical (black) vs. reconstructed (white); (b) Evolution of the lignin conversion and the product fractions: experimental (black) vs. simulated (white).

### 4. Conclusions

A stochastic procedure has been described for the modeling of the conversion of lignin. A probabilistic representation of this complex biomass compound was used based on a matrix that reflects the probability of occurrence of a set of structural elements. Two types of elements were required to represent the initial lignin: 16 aromatic rings and 6 inter-unit linkages, whose combination leads to 96 substructures. The number of available substructures was increased to 968 by extending the matrix with chemical moieties produced during the conversion of lignin. By sampling this matrix of probabilities, a representative set of molecules was created and used as input for the kinetic modeling. The hydroconversion of lignin was then simulated by means of a molecule-based kinetic Monte Carlo method.

This methodology was shown to be a valid tool for the representation of lignin polymers, providing a set of realistic structures of this complex co-polymer whose average properties accurately fit to the information from experimental analyses. Kinetic Monte Carlo techniques have also given interesting results in their application on the simulation of the hydroconversion of lignin. Besides, the simulation of the reactions does not require a pre-defined kinetic network since it is generated as the reactions proceed.

### References

- [1] Klein, M. T.; Virk, P. S. (2008), *Energy Fuels* 22, 2175–3182.
- [2] Pereira de Oliveira, L., Verstraete, J.J., Kolb, M. (2012), *Chem. Eng. J.* 207-208, 94–102.
- [3] Joffres B., Lorentz C., Vidalie M., Laurenti D., Quoineaud A.-A., Charon N., Daudin A., Quignard A., Geantet C. (2013), *Appl. Cat. B: Environmental* 145, 167–176.

### Keywords:

Lignin conversion, composition modeling, reaction kinetics, kinetic Monte Carlo, Stochastic Simulation Algorithm.